

Energy Efficient Automatic Home Generator Systems



Providing Peace of Mind

Give yourself and your family the peace of mind that comes with knowing that if the power goes out, your lights will still be on.

The 7kW Home Generator System by GE keeps the essentials powered. The lights stay on. The refrigerator keeps things cold.

The furnace keeps you toasty warm on a cold winter's night.

The sump pump and well pump keep pumping.

The compact design is comparable in size to a standard central air unit and blends in beautifully with your home's exterior and landscaping.

To learn more, visit www.ge.com/generatorsystems



imagination at work

Providing Peace of Mind

Automatic

The system continuously monitors your home's connection to utility power. The generator starts automatically when there is an outage and shuts down automatically when utility power is restored.

Reliable

GE is a name you know and trust. You can be confident that, when you need your Home Generator System by GE, it will perform. The Briggs & Stratton Extended Life Series™ engine will deliver years of reliable performance.

Warranty

The four-year limited warranty is one of the best comprehensive parts and labor warranty in the industry.

Designed Around Your Life

Compact

Home Generator Systems by GE have a smaller profile that blends in with your home – much like your central air-conditioning unit does.

Quiet


The Sound Vault™ Technology features an automotive-style exhaust system and acoustic foam dampeners for quiet, neighbor-friendly operation.

Electronics-friendly

The system delivers clean, stable power, protecting your computers and other sensitive electronic equipment from damage.

Easy Monitoring

The optional remote monitoring system allows you to check system status without leaving the house.

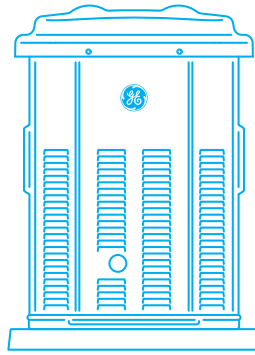

| | 40315GE |
|--------------------------------------|---|
| Fuel Type | Propane (LP Vapor), Natural Gas (NG) |
| GE Power Management | 50 Amp, 10 circuits Automatic Transfer Switch |
| Watts LP/NG | 7,000 (LP) 6,000 (NG) |
| Engine | 500cc Briggs & Stratton® Engine |
| Operation | Fully Automatic |
| Voltage | 120/240V AC, Single Phase, 1.0pf |
| Amps (240V) | 29.2 (LP) 25 (NG) |
| Alternator | Brushed |
| Voltage Regulation | Automatic |
| Full Pressure Lubrication | Yes |
| Fuel Consumption* (at ½ Load) | 33 ft³/hr, 0.92 gal/hr (LP) 80 ft³/hr (NG) |
| Weekly Exerciser | Yes |
| Sound Vault™ Technology | Yes |
| Hour Meter | Yes |
| Overcrank Protection | Yes |
| Dimensions (LxWxH) | 32" x 34.25" x 38.5" |
| Weight (Generator Only) | 299 lbs. |
| Warranty | 4 Year Limited |
| Included Extras | Each system includes a 50 Amp 10 circuit automatic transfer switch, hour meter, battery charger, installation pad and synthetic oil |
| Optional Remote System Status Alerts | Low Oil Shutdown, Fail to Start, Low Frequency, Engine Overspeed, Low Voltage, Low Battery Voltage, Oil Temp High and Transfer Switch Fault |

*Fuel consumption rates are estimated based on normal operating conditions at ½ load. Generator operation may be greatly affected by elevation and the cycling operation of multiple electrical appliances – fuel flow rates may vary depending on these factors.

This generator is rated in accordance with UL (Underwriters Laboratories) 2200 (stationary engine generator assemblies) and CSA (Canadian Standards Association) standard C22.2 No. 100-04 (motors and generators)



Is a trademark of General Electric Company and is under license by Briggs & Stratton Corporation
Post Office Box 702
Milwaukee, WI 53201 USA

Briggs & Stratton Corp. reserves the right to make changes in specifications and features shown herein, or discontinue the product described at any time without notice or obligation.